
BAR RACKS

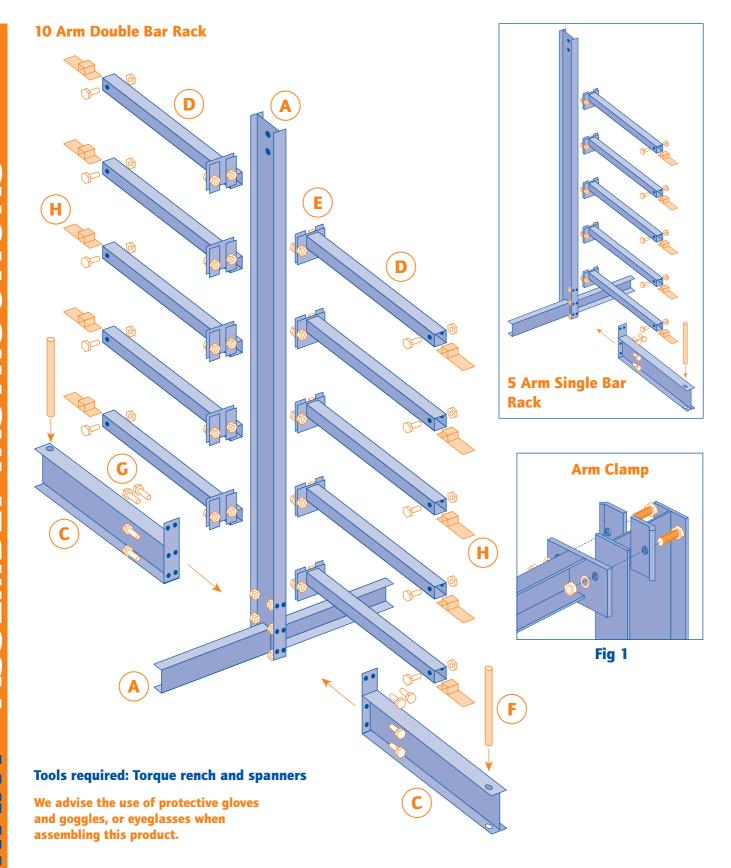

ASSEMBLY

- 1 Assemble side base beams B to upright A first using bolts G.
- 2 Fix front/rear bar beams C to the upright A using bolts G.
- **3** Add arms **D** to upright **A** using clamps **E** 4 nuts and bolts **G**. See Fig 1.
- **4** Add end stops **F** and **H** available as an extra order code RKBRE.

NB. Bolts **G**, torque to 95 Nm.

BAR RACKS


COMPONENTS



Uprights - 1 of



2000 mm




C Front/rear base bar



E Arm clamps



RKBRS - 5 pm RKBRD - 10 pm D Bar rack arms




F Bolt end stop
RKBRS - 1 of
RKBRD - 2 of



Nuts and bolts



RKBRS - 18 of RKBRD - 34 of M12 x 40 & washer (H) Optional arm end stops



M8 x 65 bolt nut & washer

SAFETY

